


NORA-B26 series



Stand-alone Bluetooth® Low Energy modules

Bluetooth LE module for ultra-low power IoT applications

- Qualified against Bluetooth® Core 6.0
- u-connectXpress software for accelerated time to market
- Small footprint and multiple antenna options
- Global certification

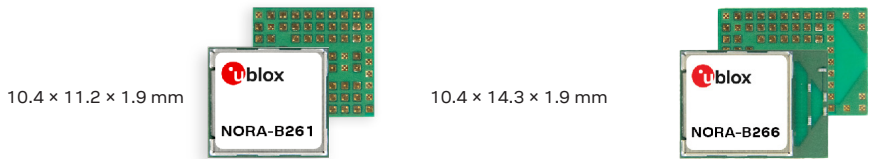

Product description

NORA-B26 is a compact, high-performing, stand-alone Bluetooth Low Energy module. The module is delivered with u-connectXpress software that provides support for u-blox Bluetooth Low Energy Serial Port Service, GATT client and server, beacons, Bluetooth long range, and simultaneous peripheral and central roles. u-blox u-connectXpress software allows hosts to easily configure connectivity using AT commands over a UART interface.

NORA-B26 provides top-grade security, thanks to secure boot, which ensures that the modules only boot up with authenticated u-connectXpress software. Leveraging Bluetooth long range feature, NORA-B26 also offers an extended communication range with reliable connections. Key markets are industrial automation, smart cities and buildings, medical and healthcare, and telematics. Specific applications include asset tracking, indoor location, sensors, and wireless-connected and configurable equipment.

NORA-B26 comes with an internal chip antenna for ease of integration in the end-product as well as an antenna pin for use with an external antenna of choice. NORA-B26 is globally certified for use with the internal or external antenna. This reduces time, cost, and effort for customers integrating NORA-B26 in their designs. To ensure operation in professional environments, the module is designed and manufactured according to u-blox professional grade requirements.

	NORA-B261	NORA-B266
Grade		
Automotive		
Professional	•	•
Standard		
Radio		
Chip inside	nRF54L10	nRF54L10
Qualified against Bluetooth Core	6.0	6.0
Bluetooth low energy	•	•
Bluetooth output power EIRP [dBm]	10	10
Max range [meters]	TBD	TBD
Antenna type (see footnotes)	pin	pcb
Application software		
u-connectXpress	•	•
Interfaces		
UART	2	2
Features		
AT command interface	•	•
Low Energy Serial Port Service	•	•
Simultaneous GATT server and client	•	•
Bluetooth secure connections	•	•
Power management	•	•
Maximum Bluetooth connections	8	8
Throughput [Mbit/s]	0.8	0.8
Secure boot and updates	•	•

pin = Antenna pin
pcb = Internal PCB antenna

NORA-B26 series



Features

Bluetooth	Qualified against Bluetooth Core 6.0
Range	Internal antenna: TBD External antenna: TBD
Max. conducted output power	7 dBm
Max radiated output power (EIRP)	Internal antenna: 10 dBm External antenna: 10 dBm
Conducted sensitivity	-94 dBm (1 Mbit/s) -102 dBm (125 Kbit/s)

u-connectXpress software

NORA-B26 modules are pre-flashed with u-connectXpress and boot-loader software that interfaces through an AT command interpreter to control customer application software running on host MCUs.

Bluetooth	u-blox Low Energy Serial Port Service (SPS) GATT server and client using AT commands Beacons 2 Mbit/s modulation 125 Kbit/s modulation long range functionality Advertising extensions
Extended Data Mode™	For simultaneous AT commands and data, and multiple simultaneous data streams
HW interfaces	2 x UART
Configuration	AT commands
Support tools	s-center 2
Operating modes	Central role Peripheral role Simultaneous central and peripheral roles LE 1M PHY LE 2M PHY LE CODED PHY Advertising extensions LE data length extension
Security	Secure boot Secure Simple Pairing 128-bit AES encryption Bluetooth Low Energy secure connections
Throughput over UART	1 Mbit/s

Electrical data

Power supply	1.7 V to 3.6 VDC
Power consumption (@ +7 dBm)	Active, advertising 31 bytes/s: 147 µA System Idle: 141 µA UART RX Off: 7 µA Deep sleep: 1 µA

Package

Dimensions	NORA-B261: 10.4 x 11.2 x 1.9 mm NORA-B266: 10.4 x 14.3 x 1.9 mm
Weight	< 0.1 g
Mounting	Machine mountable Solder pins

Environmental data, quality, and reliability

Operating temperature	-40 °C to +85 °C
Storage temperature	-40 °C to +85 °C
Humidity	RH 5-90% non-condensing

Certifications and approvals¹

Type approvals	Europe (RED), Great Britain (UKCA), US (FCC), Canada (ISED), Japan (MIC) ¹ , South Korea (KCC) ¹ , Taiwan (NCC), Australia (ACMA) ¹ , New Zealand ¹
Health and safety	EN 62479, EN 62368-1, IEC 62368-1
Bluetooth	Qualified against Bluetooth Core 6.0

¹ = Certifications are pending

Support products

EVK-NORA-B261	Full-featured evaluation kit for NORA-B261 with u-connectXpress software, using the antenna pin
EVK-NORA-B266	Full-featured evaluation kit for NORA-B266 with u-connectXpress software using the internal PCB antenna

Product variants

NORA-B261	Professional grade Bluetooth low energy module with u-connectXpress software and antenna pin for external antenna
NORA-B266	Professional grade Bluetooth low energy module with u-connectXpress software and internal antenna

Further information

For contact information, see www.u-blox.com/contact-u-blox.

For more product details and ordering information, see the product data sheet.

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents and product statuses, please visit www.u-blox.com.